


Versatile rising barrier for medium to high flow traffic: perimeter fencing, traffic management, parking areas, etc.

Description

1. Housing made of folded and welded sheet steel, from 2 to 6 mm thick, protected by cataphoresis and two coats of structured paint (standard colour: orange RAL2000).
2. Internal mechanical elements treated by electrogalvanisation.
3. Side door giving access to the mechanism, with security lock.
4. Removable cover, locked by key.
5. Aluminium tube boom arm, varnished white with red reflecting stripes and end-sealing.
6. Arm shaft mounted on two life-lubricated ball bearings. The protrusion of the shaft, centred on the housing side, allows it to be easily reversed from one side of the housing to the other: arm on the left or on the right of the framework housing.
7. Arm balancing by springs.
8. Electro-mechanical assembly including:
 - An asynchronous three-phase geared motor.
 - Movement transmission by crankshaft-rod device insuring mechanical locking of the boom arm in end positions.
 - Automatic barrier unlocking device in case of power failure, opening then being possible by hand.
 - Frequency converter ensuring progressive accelerations and controlled decelerations, for a vibration-free movement and enhanced protection of the mechanism.
 - Limit switches activated by leaf spring.
9. Lever for manual unlocking (if not automatic mode set up).
10. AS1320 control board enabling various additional commands and/or accessory options.
11. Adjustable information contacts:
 - State of the barrier's position (open or closed),
 - State of the presence detectors,
 - Command for master-slave barriers (movement of one barrier controlled by the other barrier),
 - ...
12. Fixing frame to be fixed in a concrete base to be provided by the customer.




Conventions

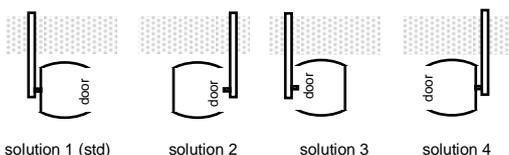

Technical Characteristics (standard)

- Electrical power supply: single phase 230VAC, 50/60Hz.
(not to be connected to a floating network or to high impedance earthed industrial distribution network)
- Nominal power consumption: 335 W (at maximum speed and without options).
- Three-phase asynchronous 250W motor.
- Life-lubricated worm-screw speed reduction unit.
- Aluminium tube boom arm, with round section diameter 84 mm.
- Free passage (L): 2 to 6 m.
Beyond 5 m, a standard tip support at the end of the arm is supplied.
- Operational temperature (without optional heating): between -20° and +50°C.
- Minimum operation time: from 1 to 4 seconds according to the boom length and the options chosen.
- Net weight (excluding arm) 83 kg.
- MCBF (mean cycles between failures): 2,000,000, with normal maintenance.
- IP44.
- Conform to EC norms.

Standard dimensions (mm)

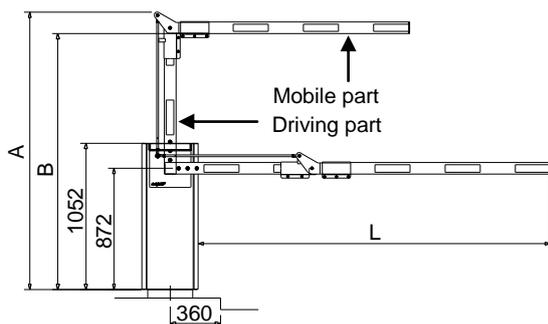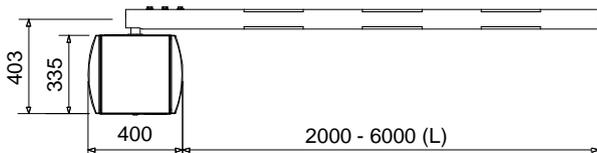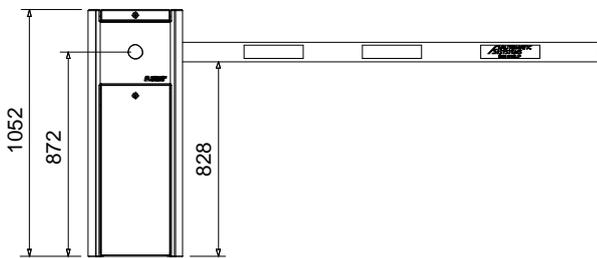

Options

1. Push button(s) box.
2. Key switch on housing.
3. Command by radio transmitter/receiver.
4. Inductive loops for cars or trucks detection.
5. Presence detector for inductive loops.
6. Photo electric cell (automatic opening, closing after passage, safety).
7. Cell support post.
8. Cell fixed on housing.
9. Aluminium rigid folding skirt for round arm ^(a).
10. Flat folding arm ^{(a) (b)}.
11. Round folding arm ^{(a) (b)}.
12. Arm swing-off device in case of vehicle impact ^(a).
13. Detector for arm swing-off.
14. Rubber protection profile on arm ^(a).
15. Standard tip support for round arm ^(a).
16. Folding tip support for round arm ^(a).
17. Electro-magnetic tip support for round arm ^(a).
18. Boom lighting (LED).
19. Traffic lights (LED) fixed on a post on housing.
20. Traffic lights (LED).
21. Support post for traffic lights.
22. STOP traffic sign Ø400 mm on the boom arm ^(a).
23. Non standard RAL colour.
24. Analogue sensor for accurate boom movement management (boom feedback).
Recommended option for arms > 4.5 m in windy sites.
25. Raised base.
26. 120 VAC, 60 Hz power supply (*reduces performances*).
27. Double limit switches for information on BL status in the event of power failure.
28. Heating resistance 80W, for operation down to -35°C.
29. Plastic folding fence ^(a).
30. Flashing light on cover.
31. Electronic board for Input/Output extension (CAN).
32. Electronic board for third-party traffic lights control.
33. Protection switches in case of door and cover opening.
34. Cooling fan for Variable Speed Controller.

(a) *Certain options are mutually incompatible and/or reduce the arm's range. Consult the "Limit of use" table of the price list.*

(b) **Folding arm (option)**

	Driving part length (mm)	A (mm)	B (mm)	L (mm)
Round arm	1030	1995	1840	2500 to 5000
	1230	2195	2040	
	1330	2295	2140	
Flat arm	1000	1972	1810	2200 or 3000
	1100	2072	1910	
	1200	2172	2010	
	1300	2272	2110	